

GATE VALVE GENERAL INFORMATION

It is a type of valve to be used for general purpose which consists of a long, flat or oval body, a disc inside it, a spindle and a spindle nut to operate the disc.

Gate valves are not used only for clean water but also can be used for sewage as long as materials of components are selected correctly.

Disc is drawn into the bonnet. It is an advantage that when valve is open, pipe line is fully clear without any obstacle; flow path is not interrupted. This advantage gives the possibility of "pigging" for cleaning of pipe line.

When valve is fully closed, disc sits on the seat surface completely. Bottom side of disc is narrower than top side. As a result of this feature, the contact between seat surfaces is interrupted and disc travels by sliding on body and bonnet guides while valve is opening. Seat surfaces are never in contact while valve is opening or closing. So, they are not worn or scratched due to friction; they are long lasting.

Gate valves, that have an operation system consists of spindle and nut, shall not be used for throttling purpose but can be used as isolation valve for on-off duty.

Gate valves are manufactured as rising spindle type or non-rising spindle type depending on usage area and selecting correct shaft material accordingly.

Installation Position, Valve should be installed as spindle in vertical position. For horizontal installation, valve should be equipped with guides and slippers.

Common Accessories for All Type of Gate Valves,


By-pass,

It is a "U" shaped equipment fixed on body, which connects outlet of valve to inlet from outside of main pipe line. There is a gate valve between two elbows.

In closed position of disc, by-pass valve is used to transfer the fluid from outlet side to inlet side. If chamber of pump is emptied, fluid can be transferred into the pump by opening by-pass valve.

It is difficult to open big diameter gate valves and valves under high differential pressure. Before opening main valve, by-pass valve opens; pressure difference on different faces of disc is balanced or decreased. It helps to open main valve with less torque requirement; valve opens easily without any damage on seats.

By-pass is applied for valves comply with EN558-1 S19 and S15 face-to-face standard.




Hand wheel,

It is a wheel to open and close the valve manually.

Cap-Top,

It is an accessory allows using T-key to open and close valve.




Headstock, Product Code, HS

If valve is installed at first floor but operational equipments are at second floor, headstock and operational equipments are placed at second floor. Extension shafts and guide brackets are between valve and headstock. So, it is not needed to be next to valve to operate it.




Chain wheel, If valve is installed at a high point, chain wheel is more practical to use than hand wheel. Chain is used to operate the valve.



Guides and Slippers,

They are used to achieve a smoother disc travel and longer valve life. Guides on body are made of stainless steel and slippers on disc are made of bronze. Disc travels on that guide-slipper system. For horizontally installed valves, that accessory is strongly recommended.



Jacking Screw,

It is located inside the valve, at the bottom of body. It is a mechanism used to move the disc upwards if there is a sticking problem. It is applied upon request.



Bevel Gearbox (1:1 Rated), Product Code, B

This is a bevel type gearbox with 1:1 ratio and 90 degrees angle between axes of input and output gears. It can be fitted on top of gearbox of any type of valve in place of hand-wheel. While fitting, four holes on connection flange are used. So, four different positions for operation are available.



RISING SPINDLE GATE VALVE



At these valves, threaded section of valve spindle is outside of the valve chamber. When valve is operated, spindle does not rotate. To open and close the valve, spindle nut is rotated. Unthreaded end of spindle is fixed on disc. When spindle nut is rotated to open the valve, spindle is pulled up. Disc is also pulled up together with spindle and drawn into the bonnet and valve opens. To close the valve, spindle nut is rotated in opposite direction.

This type of valve can be used for any kind of fluid including sea water, sewage and aggressive chemicals as long as suitable spindle material is selected.

For shaft sealing, non-asbestos packing or other special items are used.

Accessories of Rising Spindle Gate Valve:

Mechanical Indicator,

It is a mechanical equipment that shows position of disc of gate valve installed in pipe-line. It slides on a pin according to operation of spindle.

Indicator with Switch,

It is the same mechanical indicator which additionally has limit switches fixed on. Signals, indicating fully open and fully closed positions of valve, are sent to panel at operation room.

Shaft Protection Tube,


It is a pipe to protect valve shaft from any damage. Upon request, material is selected transparent to use like a mechanical indicator.



Bevel Gearbox, Product Code, GGB-B

Spindle Nut Box,

For operation of gate valves without gearbox, this accessory is used.

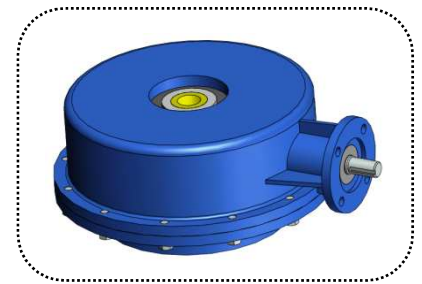

Installation Position,


Valve should be installed as spindle in vertical position. For horizontal installation, valve should be equipped with guides and slippers.

Maintenance,

In case of a problem at shaft sealing, to add more packing or to change completely, disc is opened fully to prevent water pass through shaft hole when valve is installed in the pipe line.

If there is a gearbox mounted on valve, gears are lubricated. If valve is uninstalled, cleaning of valve is advised, only.

ACCESSORIES OF RISING SPINDLE GATE VALVE

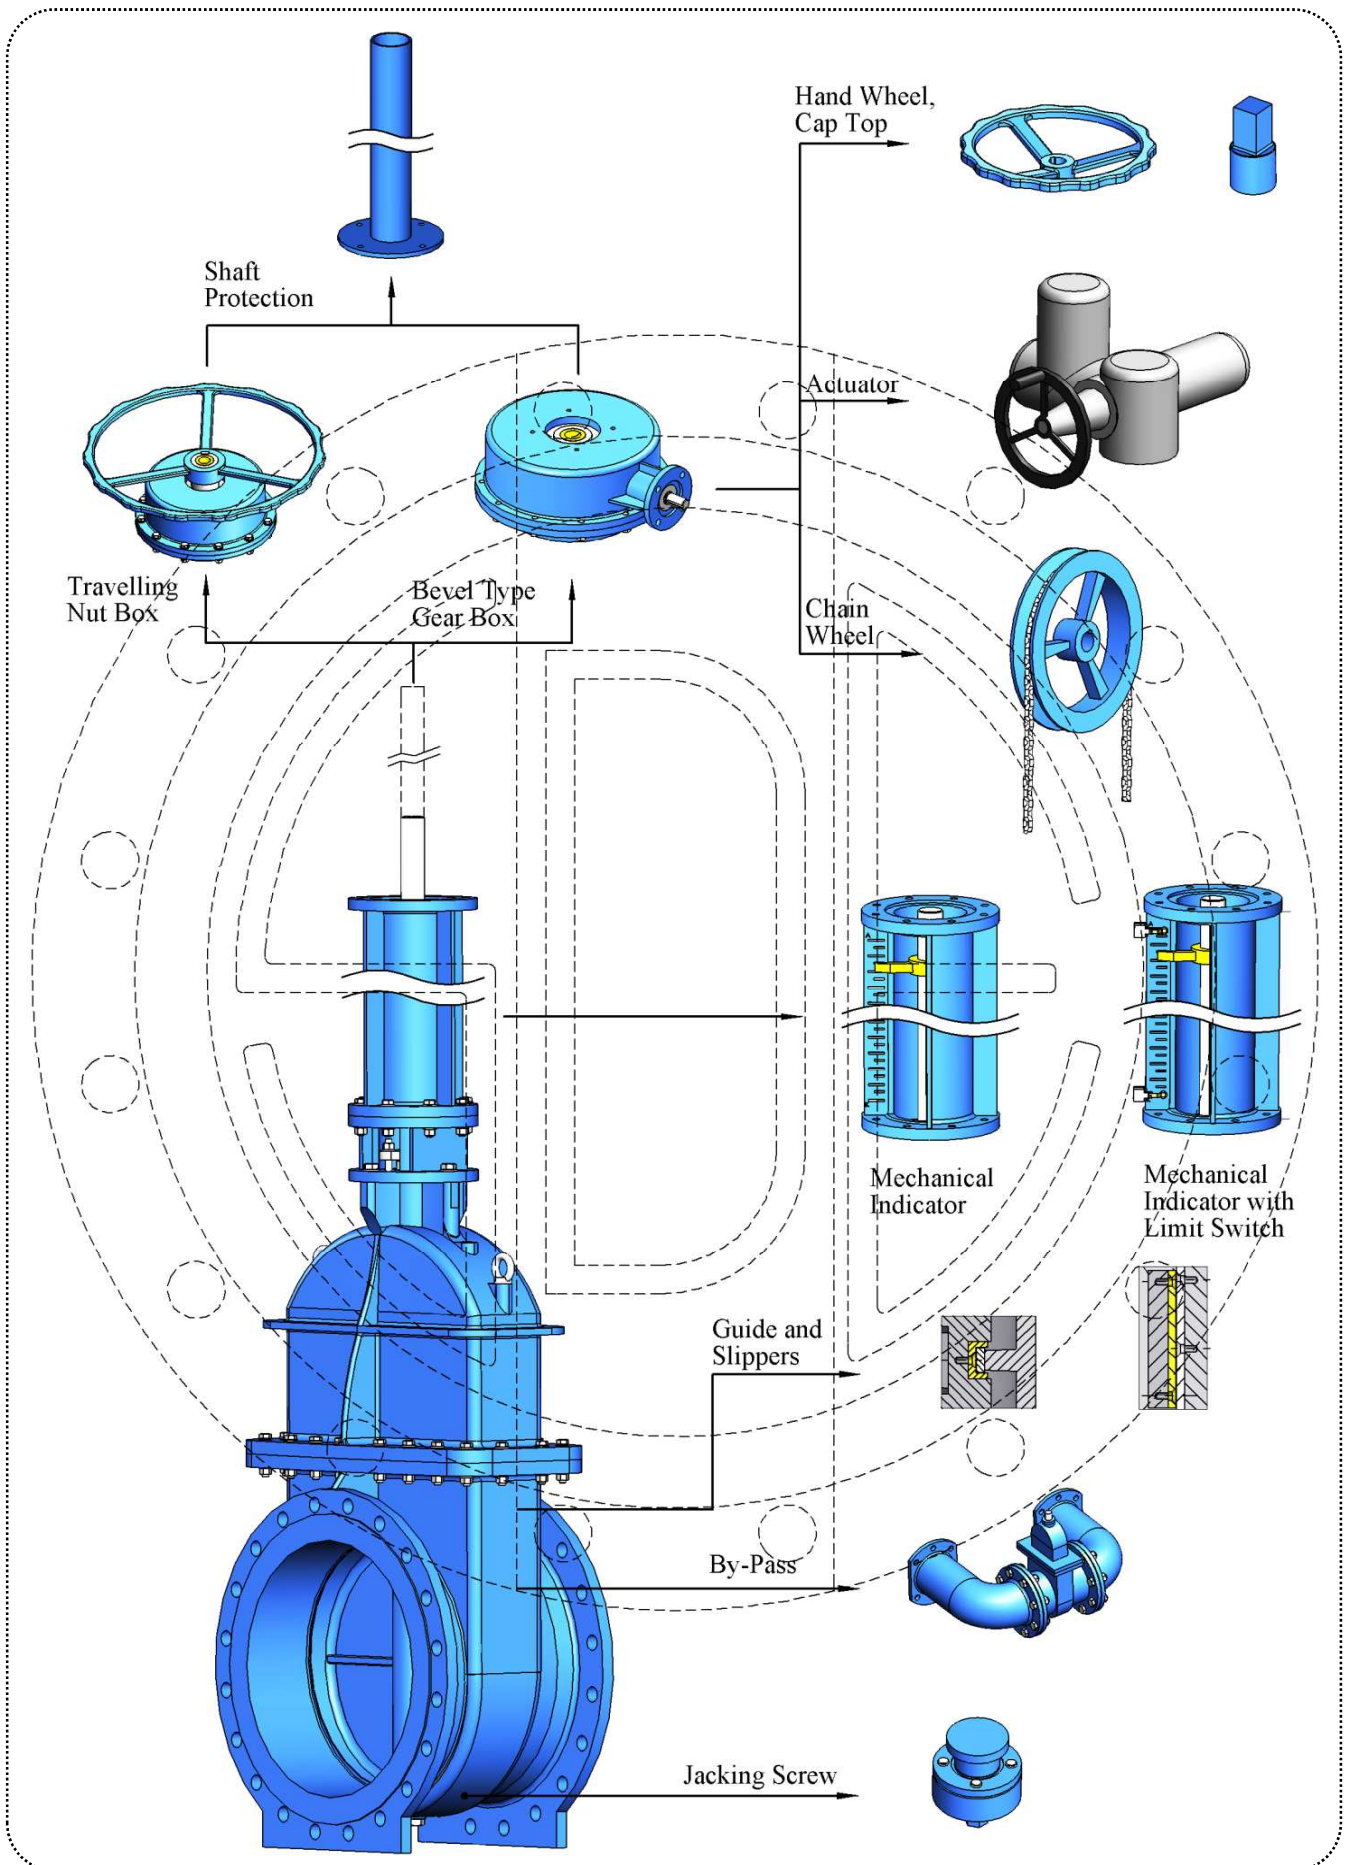


GATE VALVE RISING SPINDLE PN 16

Body Length Standard : EN 558-1, S 3, By-Pass applicable.

Valve Standard : EN 1171

Maximum allowable working temperature for all types of our valves is 80 degrees Celcius.

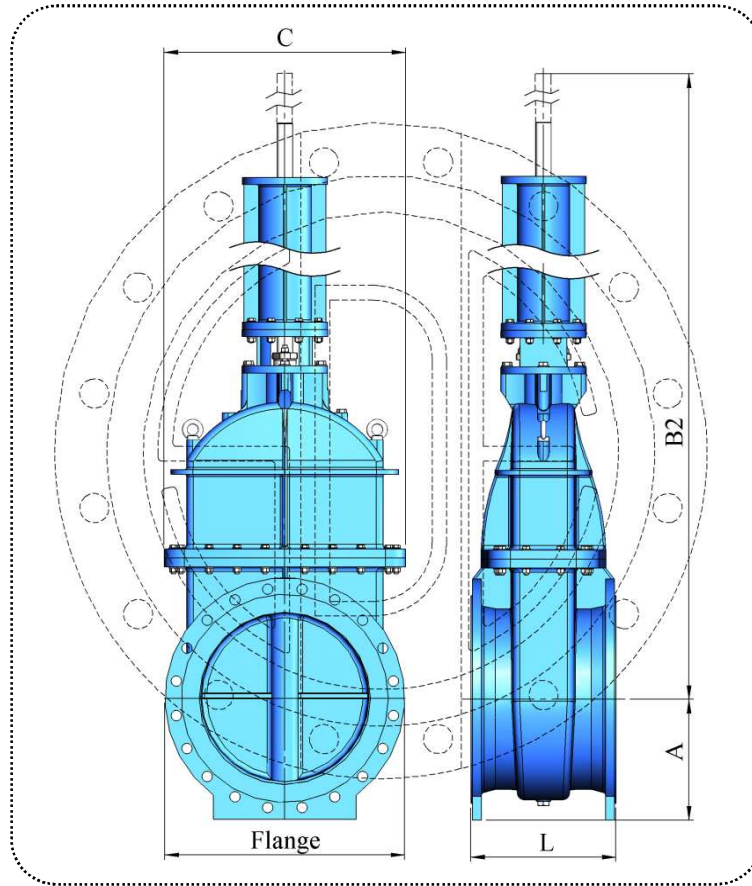

DIMENSIONS


DN	A	B2	C	L	Kg				
					Bare Shaft	Travelling Nut	With Gear box		
							Ratio 1/1	Ratio 1/4	Ratio 1/8
300	235	1.260	471	356	283	328	342	342	356
350	265	1.505	535	381	357	435	459	459	485
400	295	1.650	599	406	442	520	544	544	569
450	325	1.835	663	432	530	669	711	711	756
500	363	1.988	744	457	647	785	827	827	872
550	394	2.194	811	483	834	972	1.015	1.015	1.060
600	425	2.340	877	508	990	1.238	1.314	1.314	1.394
650	443	2.473	915	560	1.197	-	1.520	1.520	1.601
700	460	2.605	952	610	1.358	-	1.681	1.681	1.762
750	490	2.790	1.017	635	1.604	-	1.928	1.928	2.008
800	518	2.933	1.075	660	1.878	-	2.466	2.466	2.613
900	568	3.213	1.182	711	2.326	-	2.913	2.913	3.060
1.000	633	3.508	1.321	811	2.908	-	3.496	3.496	3.643
1.050	658	3.708	1.375	811	3.536	-	4.124	4.124	4.270
1.100	683	3.848	1.428	811	4.065	-	5.145	5.145	5.415
1.200	748	4.143	1.568	838	4.652	-	5.732	5.732	6.002
1.300	798	4.423	1.675	1.120	6.656	-	7.736	7.736	8.006
1.400	848	4.763	1.782	1.120	8.423	-	10.426	10.426	10.927
1.500	915	5.060	1.926	1.200	10.429	-	12.432	12.432	12.933
1.600	970	5.345	2.044	1.200	12.187	-	14.190	14.190	14.691

GATE VALVE RISING SPINDLE PN 16

Body Length Standard : EN 558-1, S 19, By-Pass applicable.

Valve Standard : EN 1171

Maximum allowable working temperature for all types of our valves is 80 degrees Celcius.

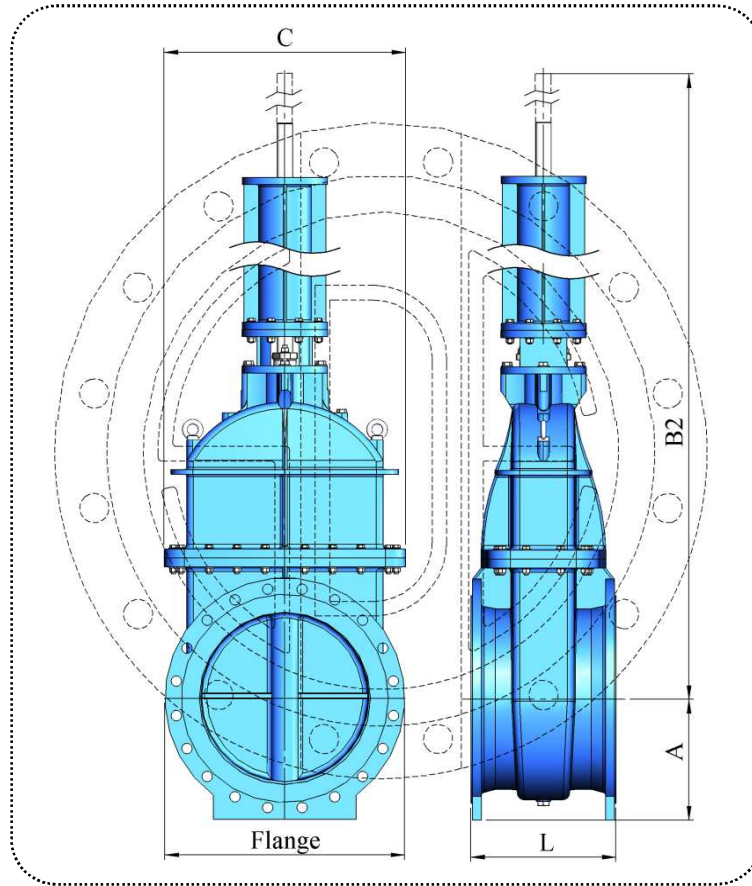

DIMENSIONS


DN	A	B2	C	L	Kg				
					Bare Shaft	Travelling Nut	With Gear box		
							Ratio 1/1	Ratio 1/4	Ratio 1/8
300	235	1.260	471	502	340	385	399	399	414
350	265	1.505	535	572	428	506	530	530	556
400	295	1.650	599	610	540	618	642	642	668
450	325	1.835	663	660	653	792	834	834	879
500	363	1.988	744	711	796	935	977	977	1.022
550	394	2.194	811	750	1.026	1.164	1.206	1.206	1.251
600	425	2.340	877	787	1.212	1.460	1.536	1.536	1.617
650	443	2.473	915	800	1.411	-	1.735	1.735	1.816
700	460	2.605	952	810	1.553	-	1.877	1.877	1.958
750	490	2.790	1.017	810	1.801	-	2.124	2.124	2.205
800	518	2.933	1.075	810	2.075	-	2.663	2.663	2.810
900	568	3.213	1.182	838	2.526	-	3.114	3.114	3.261
1.000	633	3.508	1.321	1.000	3.232	-	3.820	3.820	3.967
1.050	658	3.708	1.375	1.050	3.966	-	4.554	4.554	4.701
1.100	683	3.848	1.428	1.100	4.601	-	5.681	5.681	5.951
1.200	748	4.143	1.568	1.200	5.409	-	6.488	6.488	6.758
1.300	798	4.423	1.675	1.300	7.176	-	8.255	8.255	8.525
1.400	848	4.763	1.782	1.400	9.381	-	11.384	11.384	11.885
1.500	915	5.060	1.926	1.500	11.556	-	13.559	13.559	14.060
1.600	970	5.345	2.044	1.600	13.800	-	15.803	15.803	16.304

GATE VALVE RISING SPINDLE PN 16

Body Length Standard : EN 558-1, S 15, By-Pass applicable.

Valve Standard : EN 1171


Maximum allowable working temperature for all types of our valves is 80 degrees Celcius.

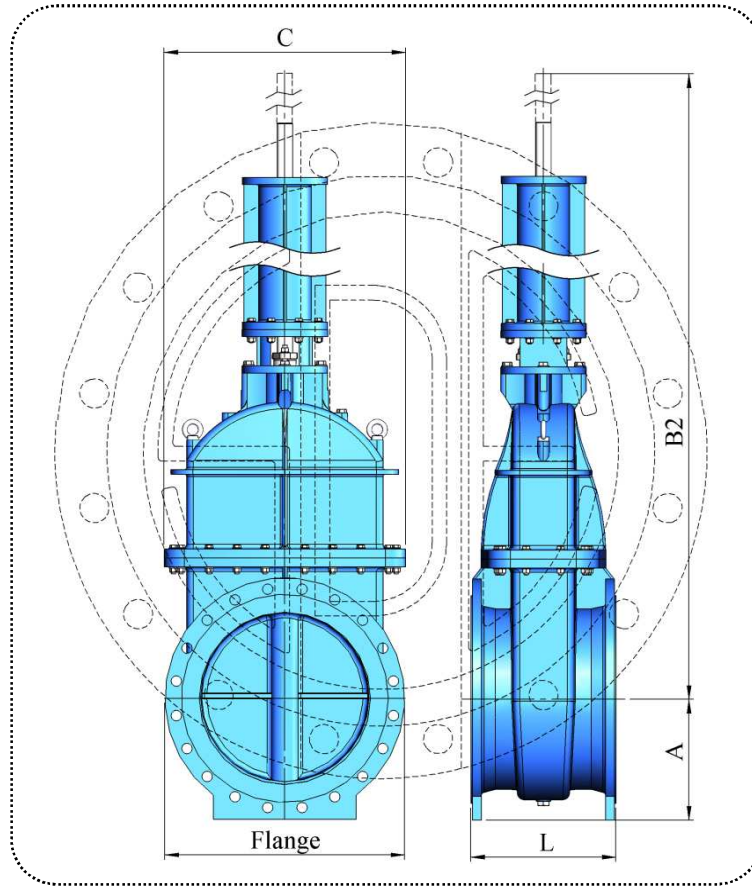

DIMENSIONS


DN	A	B2	C	L	Kg					
					Bare Shaft	Travelling Nut	With Gear box			
							Ratio 1/1	Ratio 1/4	Ratio 1/8	Ratio 1/16
300	235	1.260	471	500	339	384	398	398	413	
350	265	1.505	535	550	428	506	530	530	556	
400	295	1.650	599	600	536	614	638	638	664	
450	325	1.835	663	650	649	787	829	829	874	
500	363	1.988	744	700	791	929	971	971	1.016	
550	394	2.194	811	750	1.026	1.164	1.206	1.206	1.251	
600	425	2.340	877	800	1.221	1.469	1.545	1.545	1.626	
650	443	2.473	915	850	1.448	-	1.772	1.772	1.853	
700	460	2.605	952	900	1.622	-	1.946	1.946	2.027	
750	490	2.790	1.017	950	1.919	-	2.243	2.243	2.324	
800	518	2.933	1.075	1.000	2.254	-	2.842	2.842	2.988	
900	568	3.213	1.182	1.100	2.800	-	3.388	3.388	3.535	
1.000	633	3.508	1.321	1.200	3.479	-	4.066	4.066	4.213	
1.050	658	3.708	1.375	1.250	4.241	-	4.829	4.829	4.976	
1.100	683	3.848	1.428	1.300	4.897	-	5.977	5.977	6.246	
1.200	748	4.143	1.568	1.400	5.754	-	6.833	6.833	7.103	
1.300	798	4.423	1.675	1.500	7.545	-	8.625	8.625	8.894	
1.400	848	4.763	1.782	1.600	9.883	-	11.886	11.886	12.387	
1.500	915	5.060	1.926	1.700	12.107	-	14.111	14.111	14.611	
1.600	970	5.345	2.044	1.800	14.434	-	16.437	16.437	16.938	

GATE VALVE RISING SPINDLE

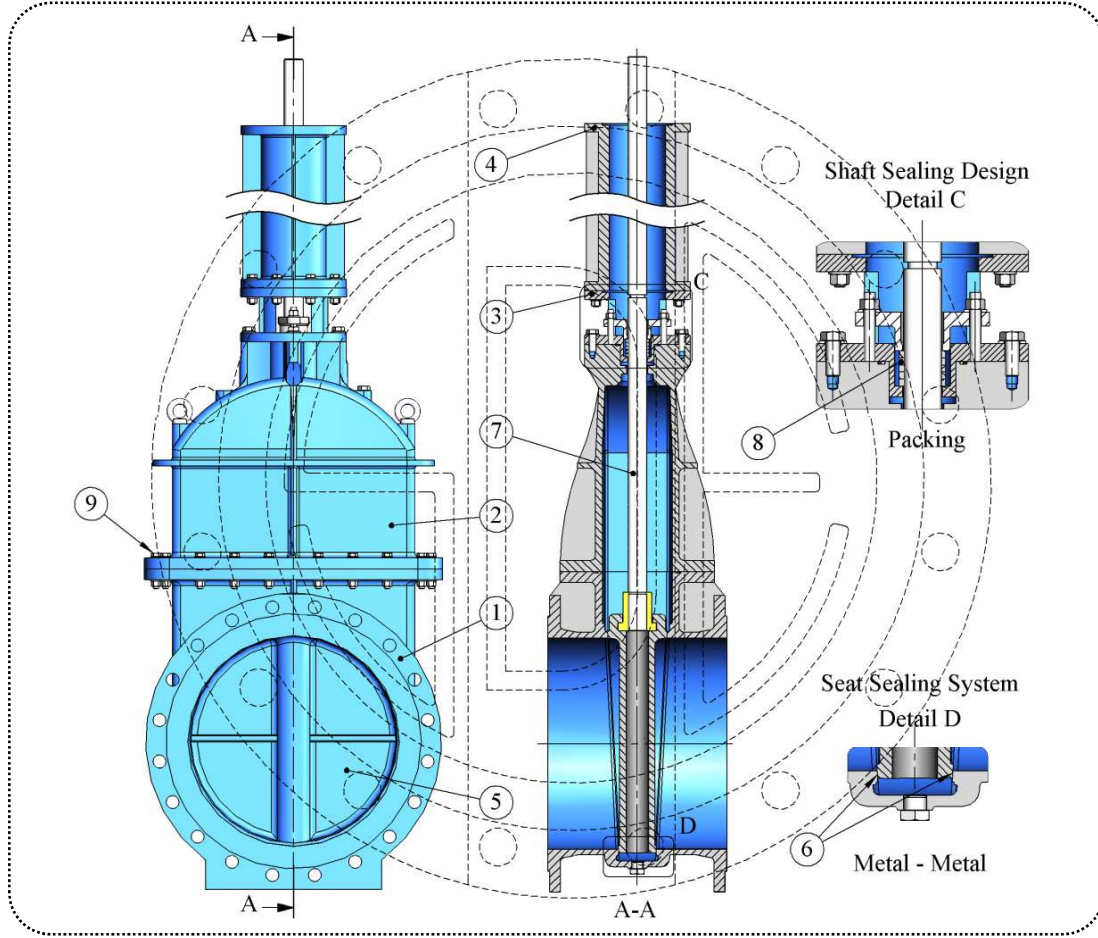

No	Item name	Material	Description	EN Standard	Material No
1-2	Body - Bonnet	GGG 40	Ductile Iron	EN-GJS-450-15	0.7040
		GGG 50		EN-GJS-500-7	0.7050
		ST 37-2	Steel Construction	EN 10025	1.0037
3	Top Thrust Cover	GGG 50	Ductile Iron	EN-GJS-500-7	0.7050
4	Extension Pipe	GGG 50	Ductile Iron	EN-GJS-500-7	0.7050
5	Disc	GGG 40	Ductile Iron	EN-GJS-450-15	0.7040
		GGG 50		EN-GJS-500-7	0.7050
		304	Stainless Steel Casting	G - X6CrNi 18-9	1.4308
		316		G - X6CrNiMo 18-10	1.4408
		CC 331G-GS	Aluminium Bronze	CuAl10Fe2-C	2.0940.01
6	Seats	CuAl8	Aluminium Bronze Welding	14640 S Cu 6100	2.0921
7	Spindle	420	Stainless Steel	X20Cr13	1.4021
		304		X5CrNi 18-10	1.4301
		316		X5CrNiMo17-12-2	1.4401
		431		X17CrNi16-2	1.4057
8	Shaft Sealing	Packing	Non Asbestos	-	-
9	Bolts Nuts	Galvanized	Steel	-	-
		A 2 - A 4	Stainless Steel	-	-
Coating		WRAS approved fusion bonded epoxy. 300 microns dft as standard.			
Maximum allowable working temperature for all types of our valves is 80 degrees Celcius.					

OPERATION
GATE VALVE RISING TYPE
PN 16

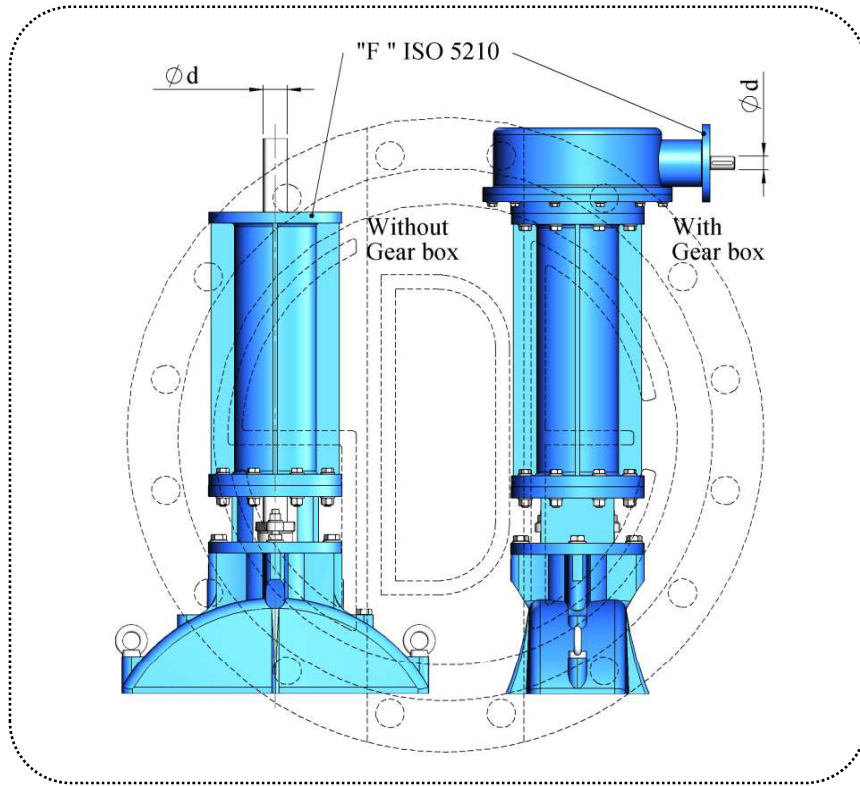

DN	Bare Shaft, Ratio 1/1				Gear Box, Ratio 1/4				Gear Box, Ratio 1/8				Gear Box, Ratio 1/16			
	F	d	Torque Nm	Number of turn	F	d	Torque Nm	Number of turn	F	d	Torque Nm	Number of turn	F	d	Torque Nm	Number of turn
300	14	30	317	27	10	20	86	106	10	20	43	213	10	20	22	426
350	16	40	484	31	10	20	132	124	10	20	66	247	10	20	33	494
400	16	40	630	35	10	20	171	141	10	20	86	282	10	20	43	563
450	16	40	794	39	14	30	216	158	14	30	108	316	10	20	54	632
500	16	40	1.088	44	14	30	296	175	14	30	148	350	10	20	74	700
550	16	40	1.448	48	14	30	393	192	14	30	197	385	10	20	98	769
600	25	50	1.720	52	14	30	467	209	14	30	234	419	10	20	117	838
650	25	50	2.200	57	14	30	598	227	14	30	299	453	10	20	149	906
700	25	50	2.543	61	14	30	691	244	14	30	346	488	10	20	173	975
750	25	50	3.170	65	14	30	861	261	14	30	431	522	10	20	215	1.044
800	30	60	3.607	70	16	40	980	278	14	30	490	556	14	30	245	1.112
900	30	60	4.914	78	16	40	1.335	312	14	30	668	625	14	30	334	1.250
1.000	30	60	6.042	87	16	40	1.642	347	14	30	821	694	14	30	410	1.387
1.050	30	60	7.678	91	16	40	2.086	364	14	30	1.043	728	14	30	522	1.456
1.100	35	70	8.452	95	25	50	2.297	381	16	40	1.148	762	14	30	574	1.524
1.200	35	70	10.056	104	25	50	2.733	415	16	40	1.366	831	14	30	683	1.662
1.300	35	70	13.380	112	25	50	3.636	450	16	40	1.818	900	14	30	909	1.799
1.400	40	80	15.449	121	30	60	4.198	484	25	50	2.099	968	16	40	1.050	1.936
1.500	40	80	19.851	130	30	60	5.394	518	25	50	2.697	1.037	16	40	1.349	2.074
1.600	40	80	22.695	138	30	60	6.167	553	25	50	3.084	1.106	16	40	1.542	2.211

BEVEL GEARBOX
TO BE USED FOR RISING SPINDLE GATE VALVES



It is a type of gearbox which consists of a body, a cover and gears.

Valves can be operated by means of a hand-wheel which is mounted at the top of spindle.

But, direct operation is not possible for valves that require high torque values. In that case, a suitable size gearbox is mounted at the top of valve and hand-wheel is mounted on gearbox pinion.

Number of turns is increased but smaller forces are capable to operate the valve.

This is a bevel type gearbox where conical gears are used. The angle between these gears is 90 degrees. While fitting, according to size of gearbox, four or eight holes on connection flange are used. So, four or eight different positions for operation are available.

Other advantage of gearbox is that if actuator operation is required for a valve, smaller size and cheaper actuator can be used.

Properties of Gearbox, Input force required to operate the valve can easily be applied by one person.

To achieve output force, suitable gear ratio is selected.

Input and output flanges and shafts are manufactured in accordance with ISO 5210 F standards.


Thus, gearbox can be mounted to another valve with same size or gearbox can be removed and another brand can be mounted instead.

If required, a suitable size actuator can be fitted or existing one can be changed with another brand.

Maintenance,

No maintenance is needed except lubricating gears.

BEVEL GEARBOX FOR RISING TYPE GATE VALVE

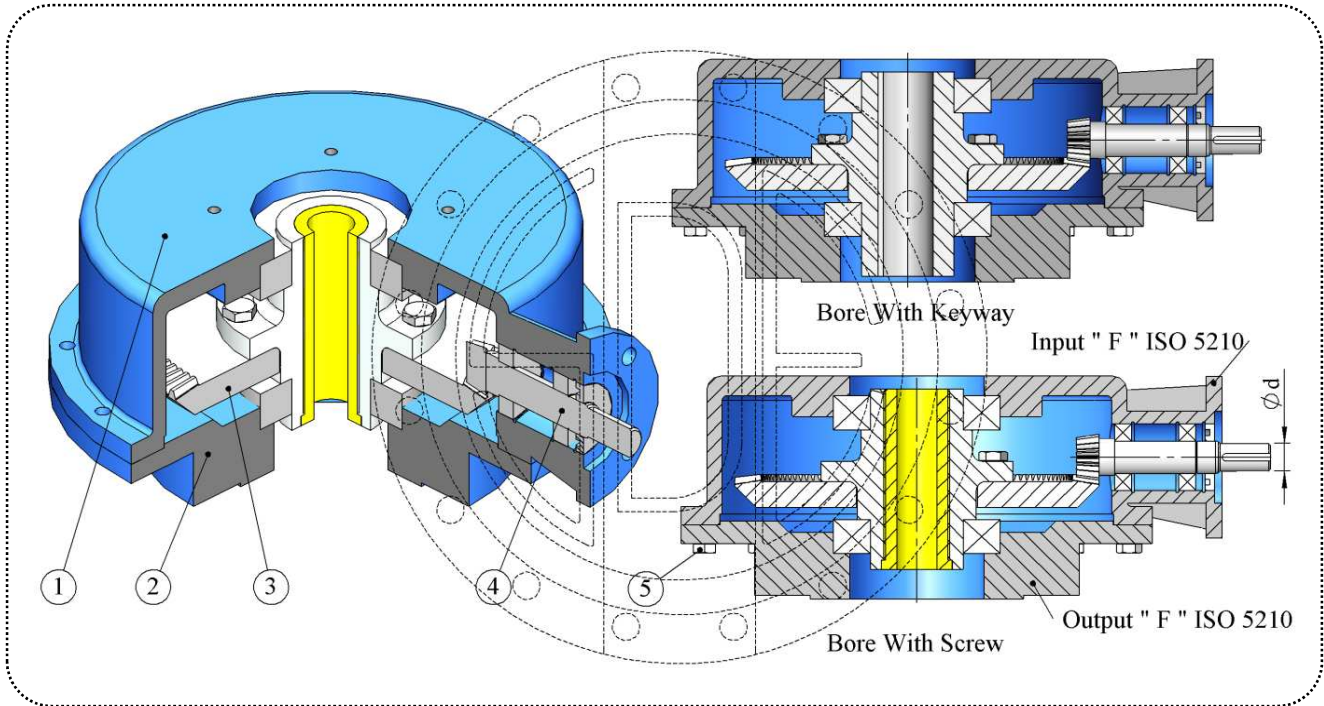


PARTS

No	Item Name	Material	Description	EN Standard	Material No
1-2	Body - Cover	GGG 50	Ductile Iron	EN-GJS-500-7	0.7050
3	Gear	1050	Steel	100083-3	1.1191
4	Pinion Gear	420	Stainless Steel	X20Cr13	1.4021
		304		X5CrNi 18-10	1.4301
5	Bolts	Galvanized	Steel	-	-
		A 2, A 4	Stainless Steel	-	-
Coating		WRAS approved fusion bonded epoxy. 300 microns dft as standard.			
Maximum allowable working temperature for all types of our valves is 80 degrees Celcius.					

TECHNICAL INFORMATION

GGB-B No	Input 1/4				Input 1/8				Input 1/16				Output		
	F	d	Torque	Kg	F	d	Torque	Kg	F	d	Torque	Kg	F	d	Torque
			Nm				Nm				Nm				Nm
1	10	20	68	34	10	20	34	34	10	20	17	43	10	25	250
2	10	20	136	59	10	20	68	59	10	20	34	73	12	30	500
3	10	20	272	102	10	20	136	102	10	20	68	128	14	40	1.000
4	14	30	543	181	14	30	272	181	10	20	136	226	16	40	2.000
5	14	30	1.359	324	14	30	679	324	10	20	340	405	25	50	5.000
6	16	40	2.717	588	14	30	1.359	588	14	30	679	735	30	60	10.000
7	25	50	5.435	1.079	16	40	2.717	1.079	14	30	1.359	1.349	35	70	20.000
8	30	60	10.870	2.003	25	50	5.435	2.003	16	40	2.717	2.504	40	80	40.000

FLANGE DIMENSIONS

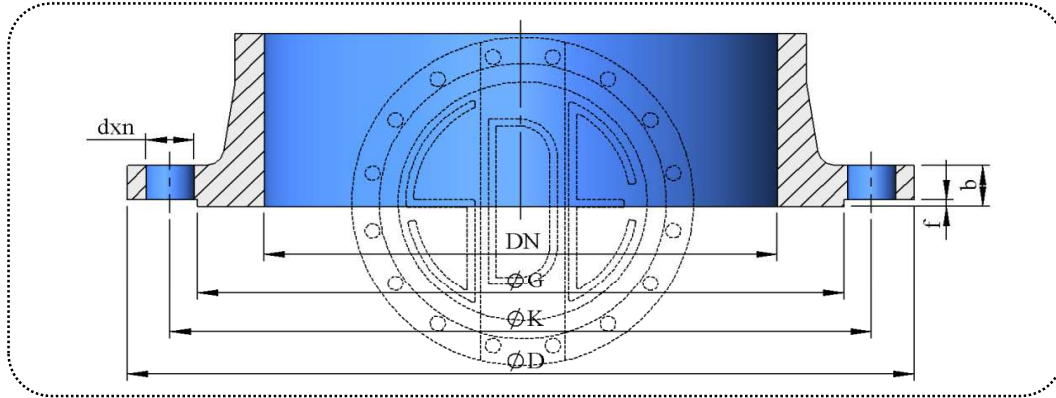

Nominal Dia	Outside Dia	Raised Face		Flange Holes			Flange Thickness	Outside Dia	Raised Face		Flange Holes			Flange Thickness
		Dia	Height	Circle Dia.	Dia	Num ber			Dia	Height	Circle Dia.	Dia	Num ber	
DN	D	G	f	K	d	n	b	D	G	f	K	d	n	b
PN 10								PN 16						
100	220	158	3	180	19	8	19	220	158	3	180	19	8	19
125	250	188	3	210	19	8	19	250	188	3	210	19	8	19
150	285	212	3	240	23	8	19	285	212	3	240	23	8	19
200	340	268	3	295	23	8	20	340	268	3	295	23	12	20
250	395	320	3	350	23	12	22	405	320	3	355	28	12	22
300	445	370	4	400	23	12	25	460	378	4	410	28	12	25
350	505	430	4	460	23	16	25	520	438	4	470	28	16	27
400	565	482	4	515	28	16	25	580	490	4	525	31	16	28
450	615	532	4	565	28	20	26	640	550	4	585	31	20	30
500	670	585	4	620	28	20	27	715	610	4	650	34	20	32
600	780	685	5	725	31	20	30	840	725	5	770	37	20	36
700	895	800	5	840	31	24	33	910	795	5	840	37	24	40
800	1.015	905	5	950	34	24	35	1.025	900	5	950	41	24	43
900	1.115	1.005	5	1.050	34	28	38	1.125	1.000	5	1.050	41	28	47
1.000	1.230	1.110	5	1.160	37	28	40	1.255	1.115	5	1.170	44	28	50
1.200	1.455	1.330	5	1.380	41	32	45	1.485	1.330	5	1.390	50	32	57
1.400	1.675	1.535	5	1.590	44	36	46	1.685	1.530	5	1.590	50	36	59
1.500	1.785	1.640	5	1.700	44	36	48	1.820	1.640	5	1.710	57	36	63
1.600	1.915	1.760	5	1.820	50	40	49	1.930	1.750	5	1.820	57	40	65
1.800	2.115	1.950	5	2.020	50	44	52	2.130	1.950	5	2.020	57	44	69
2.000	2.325	2.150	5	2.230	50	48	55	2.345	2.150	5	2.230	62	48	73
2.200	2.550	2.370	5	2.440	57	52	59	2.555	2.360	5	2.440	62	52	80
PN 25								PN 40						
100	235	162	3	190	23	8	19	235	162	3	190	23	8	19
125	270	188	3	220	28	8	19	270	188	3	220	28	8	24
150	300	218	3	250	28	8	20	300	218	3	250	28	8	26
200	360	278	3	310	28	12	22	375	285	3	320	31	12	30
250	425	335	3	370	31	12	25	450	345	3	385	34	12	35
300	485	395	4	430	31	16	28	515	410	4	450	34	16	40
350	555	450	4	490	34	16	30	580	465	4	510	37	16	44
400	620	505	4	550	37	16	32	660	535	4	585	41	16	48
450	670	548	4	600	37	20	34	685	560	4	610	41	20	50
500	730	615	4	660	37	20	37	755	615	4	670	44	20	52
600	845	720	5	770	41	20	42	890	735	5	795	50	20	58
700	960	820	5	875	44	24	47	995	840	5	900	50	24	63
800	1.085	930	5	990	50	24	51	1.140	960	5	1.030	57	24	68
900	1.185	1.030	5	1.090	50	28	56	1.250	1.070	5	1.140	57	28	73
1.000	1.320	1.140	5	1.210	57	28	60	1.360	1.180	5	1.250	57	28	80
1.200	1.530	1.360	5	1.420	57	32	69	1.575	1.385	5	1.460	62	32	88
1.400	1.755	1.570	5	1.640	62	36	74	1.795	1.600	5	1.680	62	36	98
1.500	1.865	1.680	5	1.750	62	40	75	1.910	1.700	5	1.790	70	40	102
1.600	1.975	1.790	5	1.860	62	40	81	2.025	1.815	5	1.900	70	40	108
1.800	2.195	2.000	5	2.070	70	44	88							
2.000	2.425	2.230	5	2.300	70	48	95							